

Avery Dennison® Encore™ Supreme Automotive Window Film

Superior Heat Rejection

Encore™ Supreme automotive window film delivers the perfect balance of solar performance and style, offering superior heat rejection and increased privacy in a classic black color. Advanced nanotechnology blocks up to 65% of total solar energy (TSER), keeping interiors pleasantly cool with less reliance on A/C usage.


Series	Encore™ Supreme
Technology	Nanotechnology Nanoceramic UV Stable Metal Free
Color Tone	Classic Black
Construction	2-Ply
Thickness	2 Mil
Warranty	Lifetime, Limited Non-Transferable ¹
Color Stable	Yes

Features and Benefits

- Delivers up to 91% Selective Infrared Rejection
- Unmatched color stability
- Effortless application and exceptional shrinkability
- Plotter-friendly film
- Recommended by The Skin Cancer Foundation

Sleek Classic Black Color⁵

Encore™ Supreme is offered in seven shades.

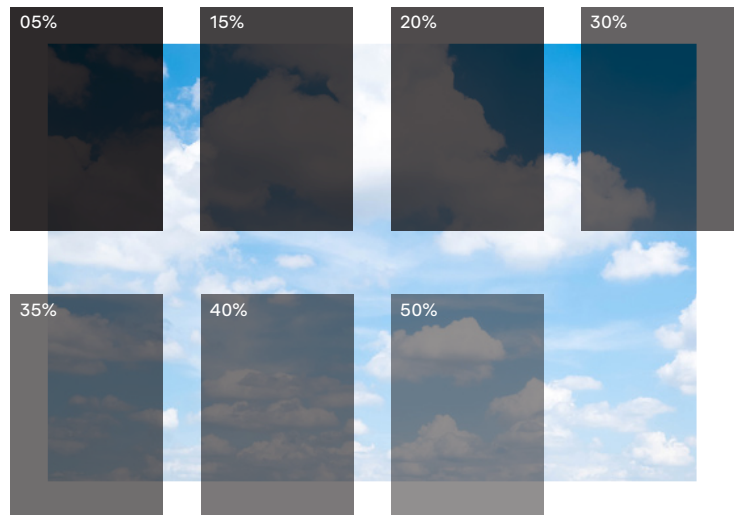

This image has been simulated and is not actual product comparison.

Optical & Solar Properties²

Encore™ Supreme Series	Ultraviolet Block	Visible Light		Glare Reduction	Selective Infrared Rejection ³	Infrared Energy Rejection ⁴	Shading Coefficient	Total Solar Energy			
		Transmitted	Reflected (Exterior)					Reflected	Transmitted	Absorbed	Rejected
Encore™ Supreme 05	>99%	8%	6%	91%	91%	64%	0.41	6%	8%	86%	65%
Encore™ Supreme 15	>99%	17%	6%	80%	88%	62%	0.45	6%	14%	80%	61%
Encore™ Supreme 20	>99%	25%	6%	72%	86%	61%	0.48	6%	18%	76%	58%
Encore™ Supreme 30	>99%	30%	6%	66%	85%	60%	0.50	6%	21%	73%	56%
Encore™ Supreme 35	>99%	36%	7%	58%	84%	59%	0.53	6%	24%	70%	54%
Encore™ Supreme 40	>99%	47%	7%	47%	80%	57%	0.58	6%	31%	63%	50%
Encore™ Supreme 50	>99%	53%	7%	39%	79%	56%	0.60	6%	34%	60%	48%

¹For information on warranty terms, exclusions and certain limitations that apply please see the applicable product data sheets and other literature and bulletins on our website: graphics.averydennison.com/pds.

²Performance results are calculated on 1/4" (6mm) clear glass using NFRC methodology and LBNL Window 5.2 software, and are subject to variations in process conditions within industry standards.

³SIRR - Selective Infrared Rejection: the percentage of IR radiation that is not directly transmitted through a glazing system. Calculated as %SIRR = 100% - % Transmission (@ 780-2500nm).

⁴IRER - Infrared Energy Rejection: the percentage of Near Infrared Energy Rejection as measured between 780-2500nm. Calculated as the TSER over 780-2500nm: %IRER = 100% - 100*SHGC (@ 780-2500nm).

⁵Colors and tinting level are an approximate match. For a true color reference, please refer to the actual film sample.

All statements, technical information and recommendations about Avery Dennison products are based upon tests and information believed to be reliable but do not constitute a guarantee or warranty of any kind. All Avery Dennison products are sold with the understanding that Purchaser has independently determined the suitability of such products for its intended and other purpose.



graphics.averydennison.com

A543624 02/2025

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison products are sold subject to Avery Dennison's general terms and conditions of sale found at <https://graphics.averydennison.com/en/home/resources-and-learning/terms-and-conditions.html>.

© 2025 Avery Dennison Corporation. All rights reserved. The "Making Possible" tagline, Avery Dennison and all other Avery Dennison brands, product names and codes are trademarks of Avery Dennison Corporation. All other brands or product names are trademarks of their respective owners. Fortune 500® is a trademark of Time, Inc. Branding and other information on any samples depicted are fictitious. Any resemblance to actual names is purely coincidental.